

NETWORK SCANNER



TAIWAN
EXCELLENCE 2017



PROFESSIONAL
(for businesses)
Powerful Customization Performance
Customizable interface that personalize according to individual businesses image for a consistent user experience




ENTERPRISE
(for large organizations)
Empower Management Process
Premium admin controls and button configuration management helps manage your solution deployment at scale



Plustek Flatbed Scanner Portfolio

Model Name	OpticBook 3900	OpticBook 3800	OpticBook 4800	OpticBook A300 Plus	OpticPro A320L	OpticPro A360 Plus	OpticSlim 2680H	OpticSlim 2610	OpticSlim 550 Plus	
Product Picture										
Image sensor	CCD	CCD	CCD	CCD	CCD	CCD	CIS	CIS	CIS	
Scanner type	A4 Flatbed	A4 Flatbed	A4 Flatbed	A3 Flatbed	A3 Flatbed	A3 Flatbed	A4 Flatbed	A4 Flatbed	A5 Flatbed	
Optical Resolution	1200 dpi	1200 dpi	1200 dpi	600 dpi	1600 dpi	600 dpi	1200 dpi	1200 dpi	1200 dpi	
Hardware Resolution	1200 x 2400 dpi	1200 x 2400 dpi	1200 x 2400 dpi	600 x 600 dpi	1600 x 1600 dpi	600 x 600 dpi	1200 x 2400dpi	1200 x 1200dpi	1200 x 1200dpi	
Light Source	CCFL	CCFL	LED	LED	LED	LED	LED	LED	LED	
Scan Speed	B/W@300 dpi	7 sec.	7 sec.	3.6 sec.	2.1 sec.	7.8 sec.	2.1 sec.	2 sec	12 sec	1.1 sec
	Gray@300 dpi	7 sec.	7 sec.	3.6 sec.	2.1 sec.	7.8 sec.	2.1 sec.	2 sec	12 sec	1.1 sec
	Color@300 dpi	7 sec.	7 sec.	3.6 sec.	2.48 sec.	7.8 sec.	2.48 sec.	3 sec	30 sec	1.5 sec
Scanner Bit Depth	Color	Input 48-bit; Output 24-bit	Input 48-bit; Output 24-bit	Input 48-bit; Output 24-bit	Input 48-bit; Output 24-bit	Input 48-bit; Output 24-bit	Input 48-bit; Output 24-bit	Input 48-bit; Output 24-bit	Input 48-bit; Output 24-bit	Input 48-bit; Output 24-bit
	Grayscale	Input 16-bit; Output 8-bit	Input 16-bit; Output 8-bit	Input 16-bit; Output 8-bit	Input 16-bit; Output 8-bit	Input 16-bit; Output 8-bit	Input 16-bit; Output 8-bit	Input 16-bit; Output 8-bit	Input 16-bit; Output 8-bit	Input 16-bit; Output 8-bit
	Black & White	1-bit	1-bit	1-bit	1-bit	1-bit	1-bit	1-bit	1-bit	1-bit
Book Edge Design	6 mm	6 mm	2 mm	2 mm	-	-	-	-	-	
Action Button	Delete, Color, Grayscale, B/W	Delete, Color, Grayscale, B/W	Delete, Color, Grayscale, B/W	Book Pavilion, Preview, Color, Grayscale, B/W	Email, File, Scan, OCR, Copy, Custom 1, Custom 2	Email, File, Scan, OCR, Copy, Custom 1, Custom 2	Copy, Scan, PDF, Custom	Copy, OCR, E-Mail, Custom, PDF	Copy, File, Scan, OCR, Custom	
Max. Scanning Area	216 x 297 mm	216 x 297 mm	216 x 297 mm	304.8 x 431.8 mm	304.8 x 431.8 mm	304.8 x 431.8 mm	216 x 297 mm	216 x 297 mm	216 x 150 mm	
Min. Scanning Area	12.7 x 12.7 mm	12.7 x 12.7 mm	12.7 x 12.7 mm	12.7 x 12.7 mm	12.7 x 12.7 mm	12.7 x 12.7 mm	12.7 x 12.7 mm	12.7 x 12.7 mm	12.7 x 12.7 mm	
Protocol	TWAIN (for Mac and Windows)	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN	
Interface	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	
Weight	3.4 Kgs	3.4 Kgs	3.45 Kgs	7.7 Kgs	7.5 Kgs	7.7 Kgs	1.8 Kgs	1.4 Kgs	1.2 Kgs	
Daily Duty Cycle	2500 pages	2500 pages	2500 pages	5000 pages	2500 pages	2500 pages	1000 pages	1000 pages	2000 pages	
Dimensions (WxDxH)	454 x 271 x 94mm	454 x 271 x 94mm	488 x 285 x 99 mm	623 x 400 x 140 mm	623 x 400 x 140 mm	623 x 400 x 140 mm	415 x 265 x 37 mm	378 x 257 x 33 mm	270 x 270 x 40 mm	

Connecting and Scanning WITH ONE DRIVER & ONE INTERFACE

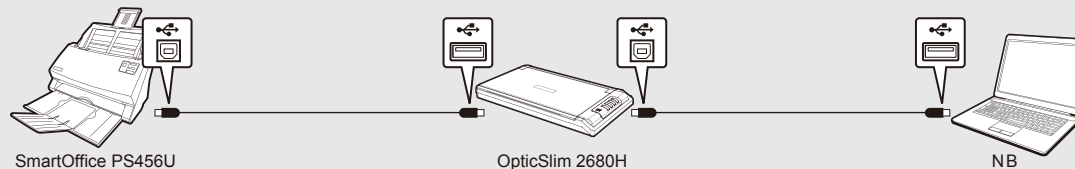





TAIWAN
EXCELLENCE 2017



eScan Series

Conveniently digitalize files with the network standalone scanner to maximize business efficiency

Model Name	eScan A250	eScan A150
Product Picture		
Image Sensor	CIS x 2	CIS x 2
Light Source	LED	LED
Optical Resolution	600 dpi	600 dpi
ADF Capacity	50 sheets (70 g/m ² , 18 Lbs)	50 sheets (70 g/m ² , 18 Lbs)
Scanning Speed	30 ppm/ 60 ipm (Grayscale mode, 200 dpi, A4 Portrait) 10 ppm/ 20 ipm (Color mode, 200 dpi, A4 Portrait)	15 ppm/ 30 ipm (Grayscale mode, 200 dpi, A4 Portrait) 15 ppm/ 30 ipm (B&W mode, 200 dpi, A4 Portrait) 4 ppm/ 8 ipm (Color mode, 200 dpi, A4 Portrait)
Scanning Area (W x L)	Max. 216 x 356 mm (8.5" x 14") Min. 13.2 x 13.2 mm (0.52" x 0.52")	Max. 216 x 356 mm (8.5" x 14") Min. 13.2 x 13.2 mm (0.52" x 0.52")
Acceptable Paper Sizes (W x L)	Max. 220 x 356 mm (8.66" x 14") Min. 50.8 x 50.8 mm (2" x 2")	Max. 244 x 356 mm (9.6" x 14") Min. 50.8 x 50.8 mm (2" x 2")
Acceptable Paper Weight (Thickness)	40 to 157 g/m ² (12 to 40 Lbs)	40 to 157 g/m ² (12 to 40 Lbs)
Daily Duty Scan (Sheets)	6,000	1,500
Roller Lifetime (Scans)	300,000	300,000
Pad Lifetime (Scans)	70,000	50,000
Power Supply	24Vdc/1.67 A	
Network Functions	Scan to Mobile Device Scan to FTP (Supports FTP/SFTP) Scan to USB Scan to PC Scan to Email Scan to Cloud	
Interface	USB 2.0 x 1, RJ45 (network connection) x 1	
Net Weight	2.8 Kgs (6.17 Lbs)	
Dimensions (W x D x H)	318 x 170 x 189 mm (12.53" x 6.69" x 7.45")	
Protocol	CPU: RK3188 Cortex A9 Quad-core GPU @ 1.6GHz Memory Size: DDR3 1GB Display: 7" 1280x800 pixels with IPS wide view multi-touch screen	
Operating Temperature	Network TWAIN Compliant	

Plustek Document Scanner Portfolio

Model Name	SmartOffice SC8016U	SmartOffice PS456U	SmartOffice PS406U	SmartOffice PS4080U	SmartOffice PS3060U	SmartOffice PS286 Plus	SmartOffice PS283	SmartOffice PS186	SmartOffice PL4080	SmartOffice PN2040	SmartOffice PL1530	MobileOffice AD450
Product Picture												
Image sensor	CIS (Duplex)	CCD (Duplex)	CCD (Duplex)	CCD (Duplex)	CIS (Duplex)	CIS (Duplex)	CIS (Simplex)	CIS (Simplex)	CIS (Duplex)	CIS (Duplex)	CIS (Duplex)	CIS (Duplex)
Scanner type	ADF	ADF	ADF	ADF	ADF	ADF	ADF	ADF	ADF + Flatbed	ADF + Flatbed	ADF + Flatbed	ADF
ADF Feeder Capacity	100 pages	100 pages	100 pages	100 pages	50 pages	50 pages	50 pages	50 pages	50 pages	50 pages	50 pages	20 pages
Scan Speed	80 ppm / 160 ipm, 300 dpi grayscale (A4 landscape)	80 ppm / 160 ipm, 300 dpi grayscale	40 ppm / 80 ipm, 200 dpi color	40 ppm / 80 ipm, 200 dpi color	30 ppm / 60 ipm, 200 dpi color	25 ppm / 50 ipm, 200 dpi grayscale	25 ppm, 200 dpi grayscale	25 ppm / 50 ipm, 200 dpi grayscale	40 ppm / 80 ipm, 200 dpi color	20 ppm / 40 ipm, 200 dpi grayscale	15 ppm / 30 ipm, 200 dpi grayscale	10 ppm / 20 ipm, 300 dpi grayscale
Action Button	Up, Down, Scan, Standby	Up, Down, Scan, Standby	Up, Down, Scan, Standby	Up, Down, Scan, Standby	Scan, Up, Down	Scan, Up, Down	File, Scan, Custom	Scan, Up, Down	Scan, PDF, Custom	Scan, PDF, Custom	PC1, Scan, PDF, Custom, PC2	PDF, BCR, Scan
Ultrasonic Function	•	•	•	•	•	-	-	-	-	-	-	-
Support Long Paper Size	Up to 200" (5080 mm)	Up to 200" (5080 mm)	Up to 200" (5080 mm)	Up to 200" (5080 mm)	Up to 200" (5080 mm)	Up to 98" (2500 mm)	Up to 14" (356 mm)	Up to 98" (2500 mm)	Up to 14" (356 mm)	Up to 14" (356 mm)	Up to 14" (356 mm)	Up to 17" (431.8 mm)
Support Plastic Card scanning	•	•	•	•	•	•	•	•	-	-	-	•
Drivers	TWAIN	TWAIN, ISIS	TWAIN, ISIS	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN	TWAIN
Interface	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0, RJ45	USB 2.0 x 2	USB 2.0
Optional				connectable w/ another scanner								
Weight	6.57 kgs	2.7 Kgs	2.7 Kgs	2.7 Kgs	1.66 Kgs	1.66 Kgs	1.66 Kgs	1.66 Kgs	4 Kgs	4 Kgs	4 Kgs	1.3 Kgs
Daily Duty Cycle	8000 pages	8000 pages	4000 pages	4000 pages	4000 pages	1500 pages	1500 pages	1500 pages	3000 pages	1000 pages	1000 pages	1500 pages
Dimensions (W x D x H)	436 x 262 x 266 mm	318.7 x 230.7 x 228.3 mm	318.7 x 230.7 x 228.3 mm	318.7 x 230.7 x 228.3 mm	263 x 128 x 148 mm	263 x 128 x 148 mm	263 x 127.5 x 148 mm	263 x 127.5 x 148 mm	418 x 326 x 101 mm	418 x 326 x 101 mm	418 x 326 x 101 mm	288.5 x 98 x 75 mm

Plustek Film & Photo Scanners Portfolio

Model Name	ePhoto Z300	OpticFilm 135	OpticFilm 8100	OpticFilm 8200i SE	OpticFilm 8200i Ai	OpticFilm 120
Product picture						
Image sensor	Color CCD	Color CCD	Color CCD	Color CCD	Color CCD	Color CCD
Scanning Materials	Film	x	•	•	•	•
	Photo	•	x	x	x	x
Film Format	135 film	x	•	•	•	•
	120 film	x	x	x	x	• (Up to 6x12)
Max. Scanning Area	8.5 inch x 11.7 inch	35 x 226 mm (Panoramic size supported)	36.8 x 25.4 mm (Regular size)	36.8 x 25.4 mm (Regular size)	36.8 x 25.4 mm (Regular size)	60 x 120 mm (Panoramic size supported)
Batch Scan	N/A	•	x	x	x	•
Resolution	600 dpi	3600 dpi	7200 dpi	7200 dpi	7200 dpi	Maximun input: 10600 dpi Maximun Output: 5300 dpi (All film type)
Light Source	White LED	White LED	White LED	White LED	White LED	White LED
Dynamic Range	2.0 D	3.4 D	3.6 D	3.6 D	3.6 D	4.01 D (with SilverFast Multi-Exposure®/ according to ISO 21550:2004)
Color Depth	48->24 bit/ pixel	48 bit/pixel	48 bit/pixel	48 bit/pixel	48 bit/pixel	48 bit/pixel
Built-in Infrared	x	x	x	•	•	•
IT8 Calibration Target	x	x	x	x	• (35mm Slide)	• (6x7 cm Slide)
Scan Mode	Sheet-fed	Motor-Driven	Manual	Manual	Manual	Motor-Driven
Preview Speed	No Preview time required	No preview time required	7.57 sec (positive film), 8.01 sec (negative film) without calibration	7.57 sec (positive film), 8.01 sec (negative film) without calibration	7.57 sec (positive film), 8.01 sec (negative film) without calibration	NA
Scan Speed	Photo (4" x 6") : Approx. 2 sec. A4 : Approx. 5 sec.	Maximun scanning area: Approx. 40 seconds@600 dpi, Approx. 205 seconds@3600 dpi	Approx. 36.02 sec (3600 dpi), 112.82 sec (7200 dpi)	Approx. 36.02 sec (3600 dpi), 112.82 sec (7200 dpi)	Approx. 36.02 sec (3600 dpi), 112.82 sec (7200 dpi)	35mm color slide: Approx. 106.49 sec (5300 dpi), 201.17 sec (5300 dpi, IR scanning ON) 6x9 cm color slide: Approx. 327.33 sec (5300 dpi), 690.05 sec (5300 dpi, IR scanning ON)
Dimensions (W x D x H)	289.9mm x 160.6mm x 158mm	175 x 259.2 x 104.3 mm	120 x 272 x 119 mm	120 x 272 x 119 mm	120 x 272 x 119 mm	210 x 374 x 189 mm
Net Weight	Approx. 1.48 Kg	Approx. 1.6 Kg	Approx. 1.6 kg	Approx. 1.6 kg	Approx. 1.6 kg	Approx. 5.7 kg
Connectivity-Interface	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0
AC Power	Output 24V, 0.75A	Output 24V, 0.75A	Output 15V, 1.0A	Output 15V, 1.0A	Output 15V, 1.0A	Output 24V, 0.75A
Software bundled	Plustek ePhoto	Plustek QuickScan Plus	Plustek QuickScan	Plustek QuickScan	Plustek QuickScan	SilverFast Ai Studio 8 (Win + Mac)
	NewSoft Presto! Page Manager 9 (Win + Mac)		SilverFast SE Plus 8 (Win + Mac)	SilverFast SE Plus 8 (Win + Mac)	SilverFast Ai Studio 8 (Win + Mac)	
OS Support	Win 7, 8, 10 Mac 10.8.x and later			Win XP, Vista, 7, 8, 10 Mac 10.7.x and later		